



USED ON
NIFTYLIFT

USED ON NIFTYLIFT



JOYSTICKS & CONTROL BOXES

ELECTRONIC JOYSTICKS



Single-axis
Used on 210
REF [151TA1691](#)



Single-axis
Used on HR28
REF [163TA7893](#)



Traction drive
Used on 170, 120H, 120T
REF [151TA1690](#)



• Single-axis
• Paddle joystick and connector
Used on 120T, 120H(TM34H), 170
REF [151TA1889](#)


USED ON NIFTYLIFT



PRINTED CIRCUIT BOARDS




Throttle

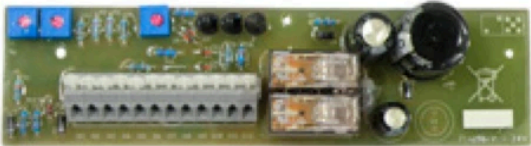


Assembly 24 V clack fully




Assembly clack fully load

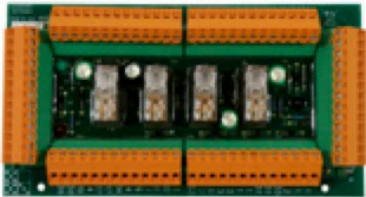


Assembly control fully load

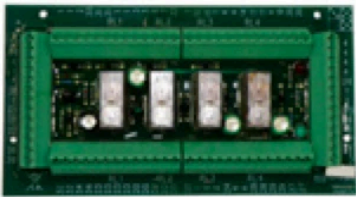

Assembly control 24 V fully load



24 V

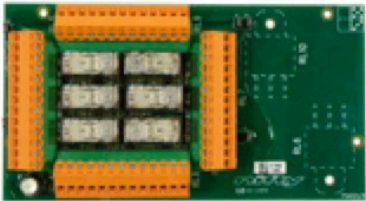

Cage control


CONTROLLERS & PRINTED CIRCUIT BOARDS

USED ON NIFTYLIFT




CONTROLLERS & PRINTED CIRCUIT BOARDS


PRINTED CIRCUIT BOARDS




Main control

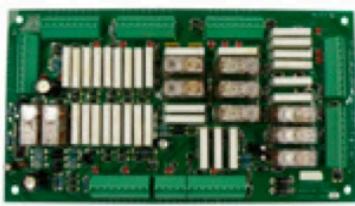


Base

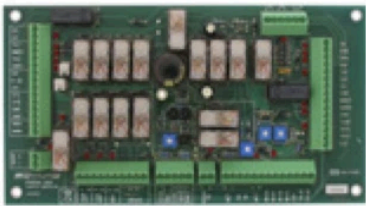

Main control



Cage control loaded

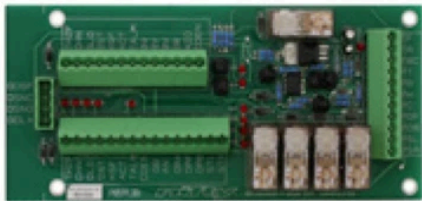

Cage control



Convertor step down 12-48 V

Although these electronic cards may resemble the one fitted on your mobile elevating work platform there can be a big difference. Therefore we always ask you to supply us with part number or full vehicle details before ordering a similar unit.

This is just a small selection of our electronic boards. For all other types, please feel free to call us!

USED ON NIFTYLIFT



ELECTRICAL PARTS

HORN



- Volume: 105 dB
- Voltage: 12 V
- Type of mounting: straight bracket
- Diameter: 90 mm

Used on 210, 120T(TM34T), 170/TM50, 120T, 120H(TM34H), 120(TM34), HR10, HR21, SD170, 170, HR15

REF 151TA1746

E-approved

BUZZERS



- Voltage: 12 V
- Volume: 78 dB
- Length: 33,4 mm
- Height: 17 mm
- Width: 15,5 mm

Used on 120H(TM34H), HR10, SD170, 170

REF 151TA1611



- Voltage: 6-13 V
- Volume: 115 dB
- Dimensions: Ø 100 x 100 mm

Used on HR12, HR10, SD170

REF 151TA1612

CONTACTORS						
	Voltage V	Maximum current interrupted A	Maximum current uninterrupted A	Magnetic blowouts	Used on	REF
	12	250	400	Yes	HR15N/17N	151TA1622
	12	150	200	No	170/TM50, HR10/HR12, SD170/SD50, 120H(TM34H), 120(TM34)-120M/ H/T/TM	151TA1875
	24	150	200	No	120(TM34)	151TA1874
	48	200	200	No	SD170, 120H(TM34H), HR12, 120T, 170/ TM50, 120(TM34), HR10, 170	151TA1876

USED ON NIFTYLIFT



ELECTRICAL PARTS

DIODE – THYRISTOR BRIDGE



- Voltage: 50 V
- Current: 50 A
- Length: 28,50 mm
- Width: 28,50 mm
- Height: 23 mm

Used on HR12, HR10

REF [151TA1601](#)

RELAY



- Type of relay: mini-relay
- Voltage: 12 V
- Type of voltage: DC
- Current: 30 A

Used on HR21

REF [151TA1792](#)

TIMER RELAY



For 12 V machines

Used on 210, 120H(TM34H),
120T, 170/TM50, 120(TM34),
HR12, HR10, SD170, 210SD,
170

REF [151TA1793](#)

USED ON NIFTYLIFT



CONTACT BLOCKS

ELECTRICAL PARTS



- Number of NO contacts: 0
- Number of NC contacts: 1
- Voltage: 400 V
- Current: 10 A

Used on SD170, 210SD

REF [146TA8397](#)



- Number of NO contacts: 1
- Number of NC contacts: 0
- Voltage: 5-24 V
- Current: 0,1-100 mA

Used on 170/TM50, HR10/
HR12, SD170/SD50, HR12, 120H
(TM34H)

REF [151TA1805](#)



- Number of NO contacts: 1
- Number of NC contacts: 0
- Voltage: 400 V
- Current: 10 A

Used on 120H(TM34H), HR10,
HR21, SD170, 170, 210

REF [146TA8396](#)



- Number of NO contacts: 1
- Number of NC contacts: 0
- Voltage: 110 VDC
- Current: 5 A

Used on 210, 120H(TM34H),
120T, HR10, HR21, SD170,
210SD, 170

REF [151TA1808](#)



- Number of NO contacts: 2
- Number of NC contacts: 0
- Voltage: 400 V
- Current: 10 A

Used on 120H(TM34H), HR12

REF [151TA1809](#)

USED ON NIFTYLIFT



ELECTRICAL PARTS

AUTOMATIC FUSE



- Type of fuse: with push button
- Voltage: 50 VDC/250 VAC
- Current: 10 A

Used on SD170, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR10, 170

REF [141TA1430](#)

REVOLVING LIGHT/STROBE LIGHT



- Height: 82 mm
- Voltage: 12-24 V

Used on 120H(TM34H), 120T, 120(TM34), HR12, HR10, SD170, 170

REF [149TA5192](#)

REAR LIGHTS



- Technology: incandescent
- Mounting: 2 bolts
- Centre distance: 152 mm
- Voltage: 12 V
- Functions: rear, stop, turn, reverse, fog, license, reflector triangle
- Bulbs included
- Connector: A8

1. REF [148TA1359](#) - LH version
2. REF [151TA6093](#) - RH version

E-approved

BULB



- Base notation: E10
- Voltage: 6 V
- Power: 1,2 W

Used on 210/TM64, 170/TM50, HR10/HR12, HR21/SP64, HR12, 120H(TM34H), 120T

REF [142TA1277](#)

DASHBOARD WARNING LIGHT



- Length: 31 mm
- Built-in diameter: 12 mm

Used on 210, 120H(TM34H), 120T, HR12, HR10, HR21, 210SD, 170, SD170/SD50

- REF [151TA1623](#) - Red
REF [151TA1624](#) - Green
REF [165TA4374](#) - Orange

USED ON NIFTYLIFT



LAMP HOLDER LIGHTS



- Length: 21 mm
- Diameter: 24 mm
- For lamp diameter: 15 mm

Used on SD170

REF [150TA6848](#)



- Length: 22 mm
- Diameter: 26 mm
- For lamp diameter: 16 mm

Used on 210, 120H(TM34H),
120T, HR10, HR21, SD170,
210SD, 170

REF [150TA6850](#)

ELECTRICAL PARTS

PLUGS AC



- Current: 16 A
- Voltage: 200/250 V

Used on HR15N/17N, 170/TM50, HR10/HR12,
120H(TM34H), HR10DC

REF [161TA8417](#)

USED ON NIFTYLIFT



ELECTRICAL PARTS

ELECTRICITY CLOSETS AND BOXES



- Length: 190 mm
- Width: 165 mm

Used on HR10/12, SD170, 170, HR12 4x4

REF [161TA8421](#)



- Length: 191 mm
- Width: 72 mm
- Height: 52 mm

Used on HR10/12, 120T, 120H, 170

REF [161TA8434](#)



- Length: 240 mm
- Width: 105 mm
- Height: 120 mm

Used on 120T, 170/TM50, 120(TM34)

REF [151TA1750](#)



- Length: 225 mm
- Width: 73 mm
- Height: 80 mm

REF [151TA2279](#)



- Length: 170 mm
- Width: 120 mm
- Height: 55 mm

Used on HR10/12, 90, 120T, 170

REF [161TA8431](#)

BATTERY REGULATOR ASSEMBLY



- Length: 118 mm
- Width: 93 mm
- Height: 34 mm

Used on 210, 120H(TM34H), 120T, 170

REF [161TA8465](#)

REGULATOR



- Voltage: 12 V
- Length: 65 mm
- Width: 84 mm
- 6-pin connection

Used on 120T, 120H(TM34H)

REF [151TA1918](#)

USED ON NIFTYLIFT



SERVOMOTOR



- Voltage: 12 VDC
- Length: 380 mm

Used on HR15N/17N

REF [150TA9834](#)

ELECTRICAL PARTS

ELECTRIC MOTORS							
	Minimum voltage V	Current A	Revolutions/ minute rpm	Power kW	Direction of rotation	Used on	REF
	24	168	3500	3	CW	120H(TM34H)	151TA1646
	24	200	3300	3	CCW	120H(TM34H), HR12, 120(TM34), 170	151TA1877

USED ON NIFTYLIFT



ELECTRICAL PARTS

BRUSH KITS



- Thickness: 10 mm
- Width: 25 mm
- Height: 23 mm
- Indicator wire: no
- Set of 4 carbon brushes

Used on 120H(TM34H), HR12, 120(TM34), 170

REF [151TA1705](#)



- Thickness: 10 mm
- Width: 25 mm
- Height: 24,4 mm
- Indicator wire: no
- Set of 4 carbon brushes

Used on 120H(TM34H), 120T, HR10, SD170, 170

REF [151TA1706](#)



- Thickness: 10,9 mm
- Width: 25 mm
- Height: 28,4 mm
- Indicator wire: no
- Set of 4 carbon brushes

Used on 170/TM50, HR12, 120H(TM34H), 120M/H/T, HR12

REF [141TA1127](#)

COMPLETE DIFFERENTIAL



- Total height: 290 mm
- Number of holes: 8

Used on HR12, HR10, SD170

REF [151TA1631](#)

REDUCTOR HUB



8 x M14 x 1,5 mm

Used on HR21/SP64

REF [151TA1791](#)

DRUM TRANSMISSION



- Total height: 78 mm
- Biggest diameter: 174 mm

Used on HR21

REF [151TA1643](#)

USED ON NIFTYLIFT



SWITCHES

IGNITION SWITCHES



- Number of positions: 2
- Built-in diameter: 21 mm
- Key number: 455

Used on 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, SD170, 170

REF [151TA1752](#) - Without key
REF [163TA8493](#) - Key



- Number of positions: 3
- Built-in diameter: 22 mm
- Key number: 455

Used on HR28 4X4, HR15/17, HR28/SP85 4X4

REF [161TA8447](#) - Without key
REF [163TA8493](#) - Key



- Number of positions: 3
- Built-in diameter: 22 mm
- Key number: 455

Used on 120H(TM34H), 170/TM50, 120(TM34), HR12, SD170, 170

REF [151TA1753](#) - Without key
REF [163TA8493](#) - Key



- Number of positions: 3
- Built-in diameter: 22 mm
- Key number: 455

Used on 170/TM50, HR10/HR12, SD170/SD50, HR12, 120H(TM34H), 120M/H/T, 120T

REF [151TA1751](#) - Without key
REF [163TA8493](#) - Key



- Number of positions: 3
- Built-in diameter: 22 mm
- Key number: 455

Used on HR21

REF [161TA8435](#) - Without key
REF [123TA9738](#) - Key



- Number of connections: 4
- Number of positions: 4
- Built-in diameter: 20 mm
- Key: REF [129TA4197](#)

Used on 210, 120H(TM34H), HR10-DC, 120T, 170/TM50, 120(TM34), HR12, HR10, HR21, SD170, 210SD, 170

REF [151TA1899](#)

KEYS FOR IGNITIONS/DOOR LOCKS



- Key number: 455
- Number of supplied keys: 1

Used on 120T, 170/TM50, 120(TM34), HR12, HR10, SD170, 170

REF [129TA4163](#)



Number of supplied keys: 2
Used on HR10, SD170, 170

REF [129TA4197](#)

USED ON NIFTYLIFT



SWITCHES

ROTARY SWITCHES



- Number of positions: 3
 - Built-in diameter: 22 mm
- Used on 210, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, HR21, 210SD, 170

REF [151TA1917](#)



- Number of positions: 3
 - Built-in diameter: 22 mm
- Used on 170/TM50, HR10/HR12, SD170/SD50, HR12, 120H(TM34H)

REF [151TA1834](#)



- Number of positions: 2
 - Built-in diameter: 22,5 mm
- Used on HR10/12, 120, 170, 210

REF [161TA8438](#)



- Number of positions: 2
 - Built-in diameter: 21,7 mm
- Used on 210, 120T, 170/TM50, 120(TM34)

REF [146TA8399](#)

MUSHROOMHEAD PUSH BUTTON



- Built-in diameter: 22 mm
 - Diameter knob: 40 mm
- Used on HR21, 210SD

REF [151TA1916](#)

EMERGENCY STOP SWITCH HIGH CAPACITY



- Maximum contact voltage: 96 V
 - Current: 250 A
 - Magnetic blowouts: no
 - Dust cover: no
- Used on HR15/17, SD170/SD50, HR12, 120(TM34)-120M/H/T(TM34M/H/T), 170/TM50

REF [151TA1769](#)

MICROSWITCHES



- Type of connections: cable
 - Number of NO contacts: 1
 - Number of NC contacts: 1
 - Number of connection holes: 2
 - Current: 1,5 A
- Used on 210, 120H(TM34H), 120T, 120(TM34), HR12, HR10, HR21, SD170, 210SD, 170

REF [151TA1807](#)



- Type of connections: cable
 - Number of NO contacts: 1
 - Number of NC contacts: 1
 - Number of connection holes: 2
 - Current: 3 A
- Used on 210, 120H(TM34H), 120T, HR10, SD170, 210SD, 170

REF [151TA1912](#)

USED ON NIFTYLIFT



SWITCHES

LIMIT SWITCHES



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 10 A

Used on 210, HR12, HR10, HR21, SD170, 210SD, 170

REF [146TA8401](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 6 A

Used on 170/TM50, 210SD, 210

REF [146TA8394](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 3 A

Used on 170/TM50, HR21/SP64, SD170/SD50

REF [151TA1803](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 16 A

REF [165TA1112](#)

ROCKER SWITCHES



- Current: 20 A
- Voltage: 12 V
- Number of connections: 3

Used on 210, 170/TM50, 120(TM34), HR12, 210SD

REF [146TA8395](#)



- Current: 20 A
- Voltage: 12 V
- Number of connections: 3

Used on HR21, SD170, 170

REF [151TA1804](#)

FOOT SWITCHES



- Number of NC contacts: 2
- Number of NO contacts: 2

Used on 120H(TM34H), HR12, HR10, SD170, 170

REF [151TA1806](#)



- Number of NC contacts: 1
- Number of NO contacts: 1

Used on 210, HR21

REF [151TA1812](#)

USED ON NIFTYLIFT



SWITCHES

PUSH BUTTONS



- Diameter: 22 mm
- Length: 27,1 mm
- Button colour: green

Used on 210/TM64, 170/TM50, HR10/HR12, HR21/SP64, 120H(TM34H)

REF [151TA1914](#)



- Diameter: 22 mm
- Built-in length: 44,5 mm
- Button colour: blue

Used on HR10/12, 120T, 120M, 120H, 170

REF [161TA8467](#)

RUBBER PUSH BUTTON



- Rubber cover
- Inner diameter: 22 mm
- Outer diameter: 30 mm
- Height: 15 mm

Used on 210/TM64, HR10/HR12, HR21/SP64, SD170/SD50, 210SD/SD64, 120H(TM34H), 120T

REF [151TA2292](#)

USED ON NIFTYLIFT



SENSORS

SPIRIT LEVEL



- Width: 45 mm
- Length: 60 mm
- Number of holes: 2
- Diameter holes: 4 mm
- Shape: triangle

Used on HR15/17, 210/TM64, 170/TM50, 210/TM64, SD170/SD50, 120H(TM34H), 120T

REF [151TA1913](#)

TILT SENSORS



- Height: 116,8 mm
- Diameter: 96,5 mm
- Switch type: solid state dual-axis level sensor
- Voltage: 7-48 VDC
- Detection: 1-10°

Used on 120H(TM34H), 120T, 170

REF [151TA1828](#)



- Height: 116,8 mm
- Diameter: 96,5 mm
- Switch type: solid state dual-axis level sensor
- Voltage: 7-48 VDC
- Detection: 1-10°

Used on TD120T, 210SD

REF [161TA8424](#)

LOAD CELL



- Length: 176 mm
- Width: 126 mm
- Height: 126 mm
- Thread length: 6000 mm

Used on 170, HR10/12, SD170, 120H, 120T

REF [161TA8418](#)

USED ON NIFTYLIFT



INDICATORS & HOUR METERS

HOUR METER



- Voltage: 100–230 VAC, 48–150 VDC
 - Width: 22,20 mm
 - Length: 45 mm
 - Number of digits: 6
- Used on 210/TM64, 170/TM50, HR10/HR12, HR21/SP64, HR12, 120H(TM34H)

REF [151TA1768](#)

BATTERY DISCHARGE INDICATOR



- Built-in dimensions:
48 x 55 mm
- Used on 210, HR21, 210SD

REF [151TA1597](#)

GAUGE – FLUID LEVEL



- Length: 165 mm
 - Width: 38 mm
 - With thermometer
- Used on HR15/17N, HR21, HR28, TD120TN, TD120T

REF [161TA8432](#)

DASHBOARD



- Dimensions: 100 x 50 mm
- Multigauge dashboard

Used on HR15N/17N

REF [165TA4375](#)

USED ON NIFTYLIFT



HYDRAULIC PARTS

HYDRAULIC INTEGRATED CIRCUIT WITH CARTRIDGE



- Diameter: 17 mm
- Length: 78 mm


Used on 120H(TM34H), 120T, HR10, SD170, 170

REF [151TA1647](#)

CARTRIDGE VALVES



- Width across flats: 27 mm
- Total length: 113 mm
- Diameter: 16 mm




Used on 120H(TM34H),
HR10-DC, 120T, 170/TM50,
120(TM34), SD170, 170

REF [151TA1878](#)



- Width across flats: 25 mm
- Total length: 75,5 mm
- Diameter: 17,5 mm




Used on HR21, 210SD

REF [151TA1649](#)



- Width across flats: 25 mm
- Total length: 87,5 mm
- Diameter: 15 mm



Used on 210, 170/TM50,
120(TM34), HR12, HR10, HR21,
SD170, 210SD

REF [151TA2301](#)

PRESSURE VALVES (FLOW)



- Thread: M20 x 1,5 mm
- Length: 89,5 mm

Used on HR15N/17N, HR28 4X4,
HR21 4X4, HR15/17, HR28/SP85
4X4

REF [161TA8415](#)



- Thread: M20 x 1,5 mm
- Length: 46,5 mm

Used on 210, HR10, HR21,
SD170, 210SD

REF [151TA1855](#)

USED ON NIFTYLIFT



HYDRAULIC PARTS

ELECTRIC CARTRIDGE	HAND PUMP
 Length: 115 mm Used on 210, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, HR21, SD170, 210SD, 170 REF 151TA1648	 - Length: 105 mm - Width: 65 mm Used on 170/TM50, 120(TM34), 170 REF 151TA1683

HYDRAULIC PUMPS						
	Total length mm	Neck diameter mm	Direction of rotation	Material of the housing	Used on	REF
	171	82,5	CW	Aluminium	HR15N/17N	151TA1684
	178,5	82,5	CCW	Aluminium	HR21, 210SD	161TA8448
	91,7	12	CCW	Aluminium	HR12, 170/ TM50, 120(TM34), 170	151TA1686
	96		CCW	Aluminium	120H(TM34H), 120T, HR10, SD170, 170	151TA1888
	196	25,4	CW	Aluminium	120H(TM34H), HR12, 170/ TM50, 120(TM34), 170	151TA1687
	214,4	82,5	CW	Aluminium	HR12, HR10, SD170	151TA1688


USED ON NIFTYLIFT




HYDRAULIC MOTORS

Type of flange

Type A



Type C




Type S
Special shape,
none of the
previous types


Type Z
Without flange

Type of shaft

Type E



Type F



Type S
Special type

HYDRAULIC PARTS

	Thread connections Inch	Type of flange	Type of shaft	Total length mm	Used on	REF
	7/8" UNF x 14 Pi	C	E	259	HR12, HR10-DC	151TA1679
	7/8" UNF x 14 Pi	S	E	259	HR12, HR10-DC	151TA1680
	7/8" UNF x 14 Pi	C	E	301	HR12, HR10-DC	151TA1887
	7/8" UNF x 14 Pi	C	E	301,5	HR12	151TA1681
	1/2" BSP x 14 Pi	A	S	148	HR12, 170/ TM50, 120(TM34), SD170	151TA1770
	3/8" BSP x 19 Pi	Z	F	160	210, 120H(TM34H), 120T	150TA9840

USED ON NIFTYLIFT




HYDRAULIC PARTS


HYDRAULIC MOTORS

Type of flange

Type A



Type C




Type S
Special shape,
none of the
previous types


Type Z
Without flange

Type of shaft

Type E



Type F



Type S
Special type

	Thread connections Inch	Type of flange	Type of shaft	Total length mm	Used on	REF
	1/2" BSP x 14 Pi	A	F	204,6	210/TM64	151TA1674
	1/2" BSP x 14 Pi	A	F	191	120H(TM34H)	151TA1645

HYDRAULIC PUMP GROUPS



- Electric motor: 24 VDC
- Power: 3 kW

REF [151TA1670](#)



- Electric motor: 24 VDC
- Power: 3 kW

Used on HR10/HR12, SD170/SD50, 120T

REF [151TA1671](#)



- Electric motor: 24 VDC
- Power: 3 kW

Used on 120T, HR10, SD170

REF [165TA4376](#)

USED ON NIFTYLIFT



HYDRAULIC MOTOR PART	INDICATOR VALVE
 Length: 165 mm Used on 120H(TM34H), 120T, SD170, 170 REF 151TA1677	 Used on HR10/12, HR21, SD170, 210SD REF 163TA7897
BREATHER	
 · Type: thread · Type of thread: M5 RH · Maximum diameter: 7 mm · Width across flats: 7 mm Used on 210, HR21, 210SD REF 151TA1846	

HYDRAULIC PARTS

USED ON NIFTYLIFT



HYDRAULIC PARTS

HYDRAULIC CYLINDERS



- Tilt cylinder
- Total measured length: 440 mm
- Diameter tube: 60 mm
- Diameter rod: 28 mm

Used on 120T, 170, SD170, HR10/12

REF [161TA8428](#)



- Lift cylinder
- Total measured length: 1256 mm
- Diameter tube: 100 mm
- Diameter rod: 60 mm

Used on HR15/17N, HR21, 210, 210SD

REF [161TA8466](#)



- Tilt cylinder
- Total measured length: 445 mm
- Diameter tube: 60,2 mm
- Diameter rod: 28 mm

Used on HR12 4x4, HR10/12, 120T

REF [151TA1573](#)



- Lift cylinder
- Total measured length: 815 mm
- Diameter tube: 73 mm
- Diameter rod: 40 mm

Used on 120T, 120(TM34), 120H(TM34H)

REF [151TA1776](#)



- Lift cylinder
- Total measured length: 875 mm
- Diameter tube: 73,3 mm
- Diameter rod: 40 mm

Used on 120H(TM34H), HR10

REF [151TA1777](#)

USED ON NIFTYLIFT



HYDRAULIC REPAIR SEAL KITS



Used on 170/TM50, HR10/HR12, SD170/SD50, HR12, 120T
REF [151TA1817](#)



Used on HR10/HR12, 120H(TM34H)
REF [151TA1821](#)

HYDRAULIC PARTS

PART OF VALVE



- Length: 84 mm
- Width: 44 mm
- Height: 28 mm
- Thread: M8 x 1,25 mm

Used on HR12, HR10, SD170
REF [151TA1763](#)

USED ON NIFTYLIFT



ENGINE PARTS

FUEL PUMP




- Voltage: 12 V
- Total height: 107,5 mm
- Centre distance: 63,5 mm
- Number of holes: 2

Used on HR21

REF [161TA8429](#)

V-BELT



- Type of belt: V-belt
- Belt width: 10 mm
- Belt height: 8 mm
- Outside length: 900 mm

Used on 120T, 120H(TM34H)

REF [151TA1907](#)

OIL DIPSTICK



Length: 93,5 mm

Used on 170/TM50, 120H(TM34H), 120(TM34)-120M/H/T(TM34M/, 120T

REF [151TA1766](#)

MUFFLERS



- Length of muffler: 245 mm
- Diameter body: 90 mm
- Outer diameter smallest tube: 35 mm
- Outer diameter biggest tube: 48 mm

Used on HR21, 210SD

REF [151TA1847](#)




- Length of muffler: 245 mm
- Diameter body: 115 mm
- Outer diameter smallest tube: 34 mm
- Outer diameter biggest tube: 39 mm

Used on 210, SD170

REF [151TA1848](#)

GASKET



- Length: 68 mm
- Diameter hole: 36 mm
- Thickness: 2,2 mm
- Material: metal

Used on 210/TM64, HR21/SP64, SD170/SD50, 210SD/SD64

REF [151TA1884](#)

USED ON NIFTYLIFT



ENGINE PARTS

RADIATOR



- Type: horizontal
- Length: 332 mm
- Width: 70 mm
- Height: 370 mm

Used on HR15/17, 210/TM64, SD170/SD50

REF [164TA1391](#)

FILLER CAPS



- Height: 48,5 mm
- Outer diameter: 48 mm

Used on 120T, HR10, SD170, 170

REF [151TA1704](#)



- Height: 17 mm
- Outer diameter: 74 mm
- Inner diameter: 45 mm

Used on 210, HR21, 210SD

REF [151TA1897](#)

USED ON NIFTYLIFT



ENGINE PARTS

ENGINE STOP SOLENOIDS



- Voltage: 12 V
- Type of current: DC
- Function: pull
- Mounting side: both sides
- Length: 134 mm

Used on 120T, 170/TM50, 120(TM34), HR12, HR10, SD170, 170

REF [135TA2476](#)



- Voltage: 12 V
- Type of current: DC
- Function: pull
- Mounting side: both sides
- Length: 131,3 mm

Used on 210, SD170

REF [151TA1764](#)



- Voltage: 12 V
- Type of current: DC
- Function: push
- Mounting side: both sides
- Length: 146 mm

Used on 210, HR12, HR10, HR21, SD170, 210SD

REF [151TA1765](#)



- Voltage: 12 V
- Type of current: DC
- Function: pull
- Mounting side: left side
- Length: 111,5 mm

Used on HR15, HR17, 210, SD170

REF [151TA1902](#)



- Voltage: 12 V
- Type of current: DC
- Function: pull
- Mounting side: both sides
- Length: 115 mm

Used on HR10, HR12,120, 120T, 170, SD170

REF [151TA1903](#)



- Voltage: 12 V
- Type of current: DC
- Function: push
- Mounting side: both sides
- Length: 81 mm

Used on HR21, 210SD

REF [161TA8427](#)

USED ON NIFTYLIFT



ENGINE PARTS

COUPLING



- Height: 61 mm
- Outer diameter: 216 mm
- Inner diameter: 25 mm

Used on HR21

REF [151TA1650](#)

STARTER ASSY



- Voltage: 12 V
- Power: 1,2 kW
- Number of teeth: 13

Used on HR21

REF [151TA1919](#)

STARTER



- Voltage: 12 V
- Power: 0,7 kW
- Number of teeth: 11

Used on HR10, SD170

REF [135TA5499](#)

USED ON NIFTYLIFT



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
Air filters					
	104	63	256	HR21 4X4, HR21/SP64, 210SD/SD64	127TA1048
	88	48	185	HR15N/17N, HR15/17, 210/TM64, SD170/SD50	127TA1923
	112	53	42	170/TM50, HR10/HR12, HR12, 120(TM34)-120M/H/T(TM34/H/T)	164TA1075
	87	43	178	210/TM64	164TA1070
	101	41,5	167	HR12, HR10/HR12, SD170/SD50, HR12, 120H(TM34H), HR10DC, 120T	164TA1066
	125	60,3	72,5	HR10/HR12, SD170/SD50, HR12	164TA1072
Oil filters					
	50,75	24,5	71,3	HR15/17	151TA1580
	128,8	39,6	176	HR21 4X4	163TA8659

USED ON NIFTYLIFT



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
	51	24,5	71,5	HR28 4X4, HR15/17	163TA8661
	70	30	130	HR15/17	152TA3202
	128,5	39,6	178	HR15N/17N, HR21 4X4	164TA1074
	128,3	39,6	175	210/TM64, HR21/SP64, 210SD/SD64	161TA8464
	50	15,3	97	170/TM50, HR10/HR12, SD170/SD50, 120T	163TA8667
	96,2	24,6	140	HR12, 170/TM50, SD170/SD50, HR10/HR12	152TA2826
	20	17	127	170/TM50, HR10/HR12, SD170/SD50, 120T	164TA1071
	51	24	202	HR28 4X4, HR28/SP85 4X4	163TA8668

USED ON NIFTYLIFT



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
	39	13	63	HR12, 120H, 120(TM34H), 120(TM34)-120M/H/T(TM34M/H/T)	164TA1076
	65	32	295	HR28 4X4, HR28/SP85 4X4	163TA8671
	84	18,5	75	HR15N/17N, HR15/17, 210/TM64, SD170/SD50	145TA5962
	68,5	18,5	85	HR28, HR15/17, HR28/SP85 4X4	164TA1069
	31	13,5	32	120T	164TA1068
	85	18,5	78	HR21 4X4, HR21/SP64, 210SD/SD64	139TA5975
	62,6	15,32	16	170/TM50, HR10/HR12, SD170/SD50, 0120H(TM34H), 120T	129TA7968
	47,2	16,8	25	120T, 170/TM50	164TA1067

USED ON NIFTYLIFT



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
Fuel filters					
	32	6	119	170/TM50, HR10/HR12, 120T	164TA1073
	44,2	8	101,5	HR28 4X4, HR15/17, HR28/SP85 4X4	163TA8680
	51	9,5	102	HR15N/17N, HR21 4X4, HR15/17, 210/TM64, HR21/SP64, SD170/SD50, 210SD/SD64	140TA8988
	58	32	144	HR10/HR12, SD170/SD50	163TA8664
	42	38	62	170/TM50, HR10/HR12, SD170/SD50, 120T	163TA8672
	84	18,5	74	HR28 4X4, HR21 4X4, HR15/17, HR21/SP64, 210SD/SD64	152TA2817

FUEL FILTERS



1

2

· Length filter 1: 270 mm

· Length filter 2: 259 mm

Used on HR28 4X4, HR15/17, HR28/SP85 4X4

REF [163TA8674](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

WEAR PADS				
	Total length mm	Material	Used on	REF
	87	Plastic	210, HR21, 210SD	151TA1883
	87	Plastic	210, HR10, HR21, 210SD	151TA1656
	120	Plastic	120T, 170/TM50, 120(TM34), 120H(TM34H), HR10, SD170, 170	151TA1655
	160	Plastic	HR15/17N, HR21, HR28, 150T, 210, 210SD	161TA8433
	280	Plastic	170/TM50, SD170, 170	151TA1882
	281	Plastic	210/TM64	151TA1578

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

BASKETS



- Height: 1160 mm
 - Width: 1110 mm
- Used on 120T, 120(TM34), 120H(TM34H)
- REF [151TA1614](#)**



- Length: 1150 mm
 - Width: 960 mm
 - Height: 660 mm
- Used on HR10, SD170, 170
- REF [151TA1617](#)**



- Length: 1730 mm
 - Width: 900 mm
 - Height: 1250 mm
- Used on 210, HR21, 210SD
- REF [151TA1837](#)**



- Length: 1400 mm
 - Width: 820 mm
 - Height: 1280 mm
- Used on HR21, SD170, 210SD, 170
- REF [151TA1840](#)**

BASKET PARTS



- Length: 1800 mm
 - Width: 860 mm
 - Height: 1170 mm
- Used on HR21 4x4, HR15/17
- REF [164TA1395](#)**



- Length: 1495 mm
 - Width: 830 mm
 - Height: 1160 mm
- Used on HR15/17
- REF [164TA1393](#)**



- Length: 665 mm
 - Height: 550 mm
- Used on 170, SD170, HR10
- REF [151TA1616](#)**

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

FLOOR PLATES



- Length: 1470 mm
- Width: 830 mm

Used on HR15/17

REF [164TA1392](#)



- Length: 1760 mm
- Width: 840 mm

Used on HR15/17, HR21 4X4

REF [164TA1394](#)

SUPPORTS



- Number of holes: 16
- Material: metal

Used on 120T, 170/TM50, 120(TM34), 120H(TM34H)

REF [151TA1841](#)



Figure 1:

- Length: 90 mm
- Height: 100 mm
- Holes: 5 x M8 x 1,25 mm



Figure 2:

- Length: 90 mm
- Holes: 3 x Ø 9 mm

REF [151TA1570](#)

LEVERS



- Total length: 205 mm
- Axle diameter: 17 mm

Used on 210, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, HR21, SD170, 210SD, 170

REF [151TA1900](#)



- Total length: 155 mm
- Axle diameter: 19 mm

Used on 210/TM64, 170/TM50, HR10/HR12, SD170/SD50, 120T

REF [161TA8463](#)



- Total length: 450 mm
- Axle diameter: 10 mm

Used on HR10/HR12, SD170/SD50

REF [151TA1760](#)



- Total length: 380 mm
- Axle diameter: 25 mm

Used on HR12, HR10, SD170

REF [151TA1761](#)

USED ON NIFTYLIFT



CABLE GUIDE PARTS

BODY & CHASSIS PARTS



- Length: 77 mm
 - Width: 48 mm
- Used on HR10/HR12

REF [151TA1836](#)



- Length: 77 mm
 - Width: 48 mm
- Used on HR10-DC, 120T, 120(TM34), 120H(TM34H), 170

REF [151TA1892](#)



- Length: 77 mm
 - Width: 48 mm
- Used on 210, HR21, 210SD

REF [151TA1895](#)



- Length: 157 mm
 - Width: 80 mm
- Used on 120T, SD170, 170

REF [151TA1700](#)



- Length: 166 mm
 - Width: 80 mm
- Used on 120T

REF [151TA1894](#)



- Length: 101 mm
 - Width: 46 mm
- Used on HR10

REF [151TA1896](#)



- Width outside/inside: 166/150 mm
 - Height outside/inside: 50/35 mm
 - Quantity of links: 1
 - Connection elements: no
- Used on SD170, 170

REF [151TA1702](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

CABLE GUIDES



- Width outside/inside: 166/150 mm
- Height outside/inside: 50/35 mm
- Quantity of links: 27
- Connection elements: no

Used on HR10

REF [151TA1893](#)



- Width outside/inside: 166/150 mm
- Height outside/inside: 50/35 mm
- Quantity of links: 28
- Connection elements: no

Used on HR10, HR12, 120T

REF [151TA1699](#)



- Width outside/inside: 166/150 mm
- Height outside/inside: 50/35 mm
- Quantity of links: 39
- Connection elements: no

Used on 120T, SD170, 170

REF [151TA1701](#)

HUB WHEEL



- Total height: 50 mm
- Number of holes: 5

Used on HR12, HR10-DC

REF [151TA1665](#)

DRIVE AXLE



Length: 690 mm

Used on 120T

REF [161TA8420](#)

STEERING AXLE PARTS



1



2

Used on HR10/12

- 1. REF [151TA1667](#) - Hub assembly LH
- 2. REF [161TA8426](#) - Hub assembly RH

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

CHASSIS ACCESSORIES



Axle assy RH
Used on 120T
REF [161TA8419](#)



Axle assy LH
Used on 120T
REF [161TA8420](#)



Used on 120, 120T, 120H, 170
REF [161TA8422](#)



· Diameter: 200 x 55 x 34 mm
· Height: 37 mm
Used on 120H, 120T, TD120TN
REF [151TA1618](#)



· Length: 455 mm
· Width: 65 mm
Used on HR15N/17N, HR15/17, HR10/HR12
REF [164TA1396](#)

BALL JOINT



· Type rod end: inner thread
· Length: 27 mm
· Thread: M5/M6
· RH/LH thread: RH
Used on HR21
REF [150TA9836](#)

MANIPULATOR KIT



Used on 210, 120T, 120H(TM34H), HR10, SD170, 170
REF [151TA1762](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

BALL JOINT ROD END



- Outer diameter: 16 mm
- Inner diameter: 5 mm
- Height: 25 mm

Used on HR21, 210

REF [151TA1797](#)

ROD END WITHOUT SPHERICAL BEARING



- Diameter: 28 mm
- Width: 20,3 mm
- Thread: M20
- Imperial pitch: 1,5 Pi
- RH/LH: RH

Used on HR12, HR10, SD170

REF [151TA1911](#)

STABILISERS



- Length: 650 mm
- Single wheel

Used on 120T, 120H(TM34H), 170

REF [151TA1862](#)



- Length: 720 mm
- Double wheel

Used on 170/TM50, 120H(TM34H), 120T

REF [151TA1857](#)



- Length: 550 mm
- Single wheel

Used on 210, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, SD170, 170

REF [151TA1613](#)

SUPPORT STEERING WHEEL



- Length: 487 mm
- Width: 193 mm
- Biggest diameter: 48 mm
- Diameter of the hole: 20,2 mm

Used on 210, HR21, 210SD

REF [151TA1593](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

BALL SCREW



Total length: 315 mm
Used on 170/TM50, SD170/SD50, HR12, 120H(TM34H), HR10DC
REF [151TA1861](#)

PARKING BRAKE LEVERS



Length: 550 mm
Used on 210, HR21, 210SD
REF [150TA9841](#)



Length: 515 mm
Used on 120, 170
REF [151TA1572](#)

BELLOWS



- Biggest length of the top: 62 mm
- Biggest inner diameter bottom: 55 mm
- Total height: 125 mm

Used on 210, 120T, 120H(TM34H), 170
REF [151TA1798](#)



- Biggest inner diameter top: 9 mm
- Biggest inner diameter bottom: 21 mm
- Total height: 30 mm

Used on 210, 120T, SD170, 170
REF [151TA1800](#)

STEEL CABLE



- Total length: 1070 mm
- Diameter: 3 mm

Used on 210, 120H(TM34H), HR10-DC, 120T, 170/TM50, HR12, HR10, HR21, SD170, 210SD, 170
REF [151TA1696](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

CONTROL CABLES



- Total length: 1460 mm
- Diameter cable: 3,5 mm
- Length sleeve: 1285 mm

Used on HR12

REF [151TA1697](#)



- Total length: 1465 mm
- Diameter cable: 3,5 mm
- Length sleeve: 1280 mm

Used on HR12

REF [151TA1698](#)



- Total length: 3260 mm
- Diameter cable: 3,5 mm
- Length sleeve: 3075 mm

Used on HR12

REF [161TA8460](#)

BRAKE SHOES KITS



Used on HR21, 210SD

REF [151TA1748](#)



Used on 120T, 120H(TM34H)

REF [151TA1749](#)

WINDOW PANEL PLEXIGLASS



- Length: 91,8 mm
- Width: 87,6 mm

Used on HR28

REF [163TA7898](#)

USED ON NIFTYLIFT



BODY & CHASSIS PARTS

RUBBER MOUNTS



- Hexagon or polygon shape pad and 2 x outer
- Length: 22,5 mm
- Thread: M8 x 1,25 mm
- Overall length: 65 mm

Used on HR10, HR21, SD170, 210SD

REF [151TA1829](#)



- Inner diameter: 16 mm
- Overall length: 171 mm

Used on 210, HR12, HR10, HR21, SD170, 210SD

REF [151TA1830](#)



- Diameter: 31 mm
- Length: 95 mm
- Thread: M12
- Overall length: 171 mm

REF [161TA8454](#)



- Rectangular or square pad with 2 holes
- Diameter: 8 mm
- Length: 44,4 mm
- Overall length: 125 mm

Used on 120T, 170/TM50, 120(TM34), 120H(TM34H), 170

REF [151TA1799](#)



- Length: 200 mm
- Width: 150 mm
- Height: 14 mm
- Diameter hole: 52 mm

REF [161TA8455](#)

ROLLER



- Diameter roller: 51,2 mm
- Width roller: 100 mm
- Diameter shaft: 19 mm
- Without a bushing

Used on 210, 170

REF [151TA1795](#)

USED ON NIFTYLIFT



COVERS & ACCESSORIES

DOOR HANDLES



Diameter: 61 mm
Used on 210, HR21, SD170, 210SD

REF [151TA1891](#)



Used on HR21, 210SD

REF [151TA1692](#)



- Length: 98 mm
- Width: 24/47 mm

Used on 210/TM64, HR21/SP64, SD170/SD50, 210SD/SD64

REF [151TA1693](#)



- Length: 93 mm
- Width: 34 mm

Used on HR12, SD170

REF [151TA1890](#)



Length: 272 mm
Used on 210, 120H(TM34H), 120T, 170/TM50, 120(TM34), HR12, HR10, HR21, SD170, 210SD, 170

REF [151TA1694](#)



- Length: 245 mm
- Width: 25 mm
- Diameter holes: 6/6,7 mm

Used on 120T, 170/TM50, 120(TM34), 120H(TM34H), 170

REF [151TA1695](#)

GAS SPRING




- Type: push
- Centre distance: 505 mm

Used on 120H(TM34H), 120M/H/T(TM

REF [151TA1661](#)

PROTECTIVE COVER



REF [164TA1390](#)

USED ON NIFTYLIFT



COVER



- Length: 470 mm
- Width: 270 mm
- Height: 95 mm

Used on HR10/HR12

REF [151TA1626](#)

MUD GUARD



- Length: 695 mm
- Width: 170 mm

Used on 120T, 120H, 140

REF [151TA1832](#)

HOOD ENGINE



Length: 662 m

Used on HR12/12NDE

REF [151TA1629](#)

COVERS & ACCESSORIES

USED ON NIFTYLIFT



DECALS

DECALS



• Length: 84 mm
• Height: 84 mm

Used on 210, 120H(TM34H), 120T, 170


REF 151TA1707



• Length: 103 mm
• Height: 62 mm

Used on 210/TM64, 170/TM50, HR10/HR12, HR21/SP64, HR15/HR17, SD170/SD50, NIFTY 90, 120T(TM34T), 120(TM34), 120H(TM34H), 120T

REF 151TA1710



• Length: 32,8 mm
• Height: 22 mm

Used on 210, 120T(TM34T), 120H(TM34H), 170/TM50, 120T, 120(TM34), HR10, HR21, SD170, 90, 170, HR15

REF 151TA1712



• Length: 251 mm
• Height: 292 mm

Used on 120T(TM34T), 120H(TM34H), 120(TM34), 170

REF 151TA1718



• Length: 95 mm
• Height: 50,5 mm

Used on HR10, HR21, HR15

REF 151TA1719



• Length: 51 mm
• Height: 47 mm

Used on 210


REF 151TA1725



• Length: 45 mm
• Height: 45 mm

Used on HR21, HR15

REF 151TA1738



• Length: 244 mm
• Height: 269 mm

Used on HR21 4X4

REF 151TA1721



• Length: 233 mm
• Height: 103 mm

Used on 120T(TM34T), 120H(TM34H), 170/TM50, 120T, 120(TM34), SD170, 170

REF 151TA1709



• Length: 231 mm
• Height: 112 mm

Used on 210, 120T(TM34T), 120H(TM34H), 170/TM50, 120T, 120(TM34), HR10, HR21, SD170, 90, 170, HR15

REF 139TA2929

USED ON NIFTYLIFT



DECALS


DECALS



- Length: 600 mm
- Height: 200 mm

Used on 120T(TM34T),
120H(TM34H), 120(TM34), HR21,
90, 170, 210

REF [151TA1727](#)



- Length: 240 mm
- Height: 265 mm

Used on 210/TM64

REF [151TA1743](#)



- Length: 162 mm
- Height: 124 mm

Used on HR15/17, HR15/17N

REF [161TA8437](#)



- Length: 230 mm
- Height: 20 mm

Used on HR10

REF [161TA8440](#)



- Length: 304 mm
- Height: 58 mm

Used on 120T, 120T(TM34T), 170/TM50, HR10(SP26),
HR10(TM26), HR10, SD170, 170

REF [151TA1713](#)



- Length: 175 mm
- Height: 46 mm

Used on 210, 120T(TM34T), 120H(TM34H), 170/TM50, 120T,
120(TM34), HR10, HR21, SD170, 90, 170, HR15

REF [151TA1720](#)



- Length: 208 mm
- Height: 43,5 mm

Used on 210, 120T(TM34T), 120H(TM34H), 170/TM50, 120T,
120(TM34), HR10, HR21, SD170, 170, HR15

REF [123TA4896](#)



- Length: 252 mm
- Height: 57 mm

Used on 120T(TM34T), 120H(TM34H), 120(TM34), 170


REF [151TA1724](#)



- Length: 293 mm
- Height: 30 mm

Used on HR15N/17N,
HR28/SP85 4X4

REF [161TA8445](#)



- Length: 46 mm
- Height: 95 mm

Used on HR15N/17N,
HR28/SP85 4X4

REF [161TA8446](#)

USED ON NIFTYLIFT



DECALS

DECALS



- Length: 75 mm
- Height: 55 mm

Used on SD170

REF [151TA1711](#)



- Length: 82 mm
- Height: 82 mm

Used on 120T(TM34T), 120(TM34), HR10, SD170, 90, 170, 210

REF [151TA1729](#)



- Length: 137 mm
- Height: 33,5 mm

Used on 120T(TM34T), 120H(TM34H), 170/TM50, 120T, 120(TM34), 170

REF [151TA1734](#)



- Length: 137 mm
- Height: 35 mm

Used on 120T(TM34T), 120H(TM34H), 120(TM34), SD170, 170, 210

REF [151TA1735](#)



- Length: 158 mm
- Height: 35 mm

Used on 210, HR15, 120T(TM34T), 120H(TM34H), 120(TM34), HR10, HR21, SD170, 90, 170

REF [151TA1736](#)



- Length: 168 mm
- Height: 128 mm

Used on 210/TM64, 170/TM50, HR10/HR12, HR21/SP64, HR15/HR17, SD170/SD50, 120T(TM34T), 120H(TM34H), 120T

REF [151TA1745](#)



- Length: 215 mm
- Height: 335 mm

Used on HR15/17, HR28 4X4

REF [151TA2274](#)



- Length: 485 mm
- Height: 125 mm

Used on HR21, HR15

REF [151TA1714](#)



- Length: 489 mm
- Height: 124 mm

Used on 210, 120T(TM34T), 120H(TM34H), 170/TM50, 120T, 120(TM34), HR10, HR21, SD170, 90, 170, HR15

REF [151TA1716](#)

USED ON NIFTYLIFT



WHEELS & TYRES

SOLID TYRE KIT



Used on HR10

REF [151TA1858](#)

On request

PNEUMATIC TYRE KITS



Used on 120T

REF [161TA8425](#)

On request



Used on 120H(TM34H), 120T, HR12, HR10, SD170, 170

REF [151TA1598](#)

On request

ANTI-PUNCTURE TYRES



Used on 120T, 120H(TM34H), 170

REF [151TA1599](#)

On request



Used on HR10

REF [151TA1600](#)

On request

USED ON NIFTYLIFT



WHEELS & TYRES

WHEEL BOLTS



- Neck diameter: 14,2 mm
- Length: 40 mm
- Type of thread: 1/2" UNF
- Imperial pitch: 20 Pi
- RH/LH: RH

REF [151TA1859](#)



- Neck diameter: 14,5 mm
- Length: 50 mm
- Type of thread: M14
- Metric pitch: 1,5 mm
- RH/LH: RH

Used on 120T, 120H(TM34H)

REF [151TA1860](#)



- Length: 44,4 mm
- Type of thread: M14
- Metric pitch: 1,5 mm
- RH/LH: RH

REF [151TA2303](#)

WHEEL NUTS



- Type: cone head
- Thread: 1/2" UNF
- RH/LH: RH
- Pitch: 20 Pi
- Wrench opening: 3/4"

REF [151TA2329](#)



- Type: cone head
- Thread: 5/8" UNF
- RH/LH: RH
- Pitch: 18 Pi
- Wrench opening: 15/16"

REF [161TA8450](#)



- Type: cone head
- Thread: 1 1/8" UNF
- RH/LH: RH
- Pitch: 18 Pi
- Wrench opening: 1 5/8"

REF [161TA8462](#)

USED ON NIFTYLIFT



HUB CAPS	
 • Outer diameter: 55,2 mm • Diameter passing: 50,5 mm Used on HR10/HR12, 120H(TM34H), 120T REF <u>161TA8461</u>	 • Outer diameter: 78 mm • Diameter passing: 73,8 mm Used on HR21 REF <u>151TA1886</u>

WHEELS & TYRES

USED ON NIFTYLIFT



HARDWARE

PINS			
	Diameter mm	Total length mm	REF
	8	160	151TA1586
	18	114	151TA1594
	18,5	40	151TA1589
	25	202	151TA1588
	25	166	151TA1590
	30	176	151TA1596
	30	140	151TA1592
	40	367	151TA1585

USED ON NIFTYLIFT



HARDWARE

SPECIAL BOLTS



Dimensions: M6 x 1 mm
Used on HR10/12, SD170
REF [163TA7899](#)



Dimensions: M8 x 1,25 mm
Used on 210, HR21, 210SD
REF [151TA1663](#)



Dimensions: M10 x 1,5 mm
REF [151TA1901](#)

RETURN SPRINGS



• Length: 48 mm
• Diameter: 16 mm
• Thread diameter: 2 mm
Used on HR10, HR21, SD170, 210SD
REF [151TA1850](#)



• Length: 186,5 mm
• Diameter: 26,8 mm
• Thread diameter: 4 mm
Used on 120H(TM34H), 170
REF [151TA1851](#)

PRESSURE SPRING



• Length: 106,5 mm
• Diameter: 24 mm
Used on HR12
REF [151TA1852](#)

SPECIAL SCREW



• Diameter: M24 x 3 mm
• Length between the head and end: 70 mm
Used on HR15/17N, HR21, 170, 210, 210SD
REF [151TA1863](#)

USED ON NIFTYLIFT



NOTES